

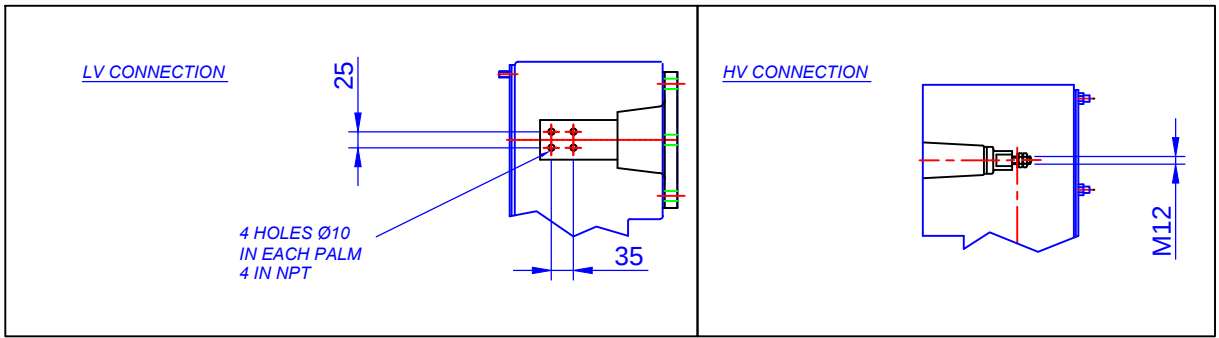


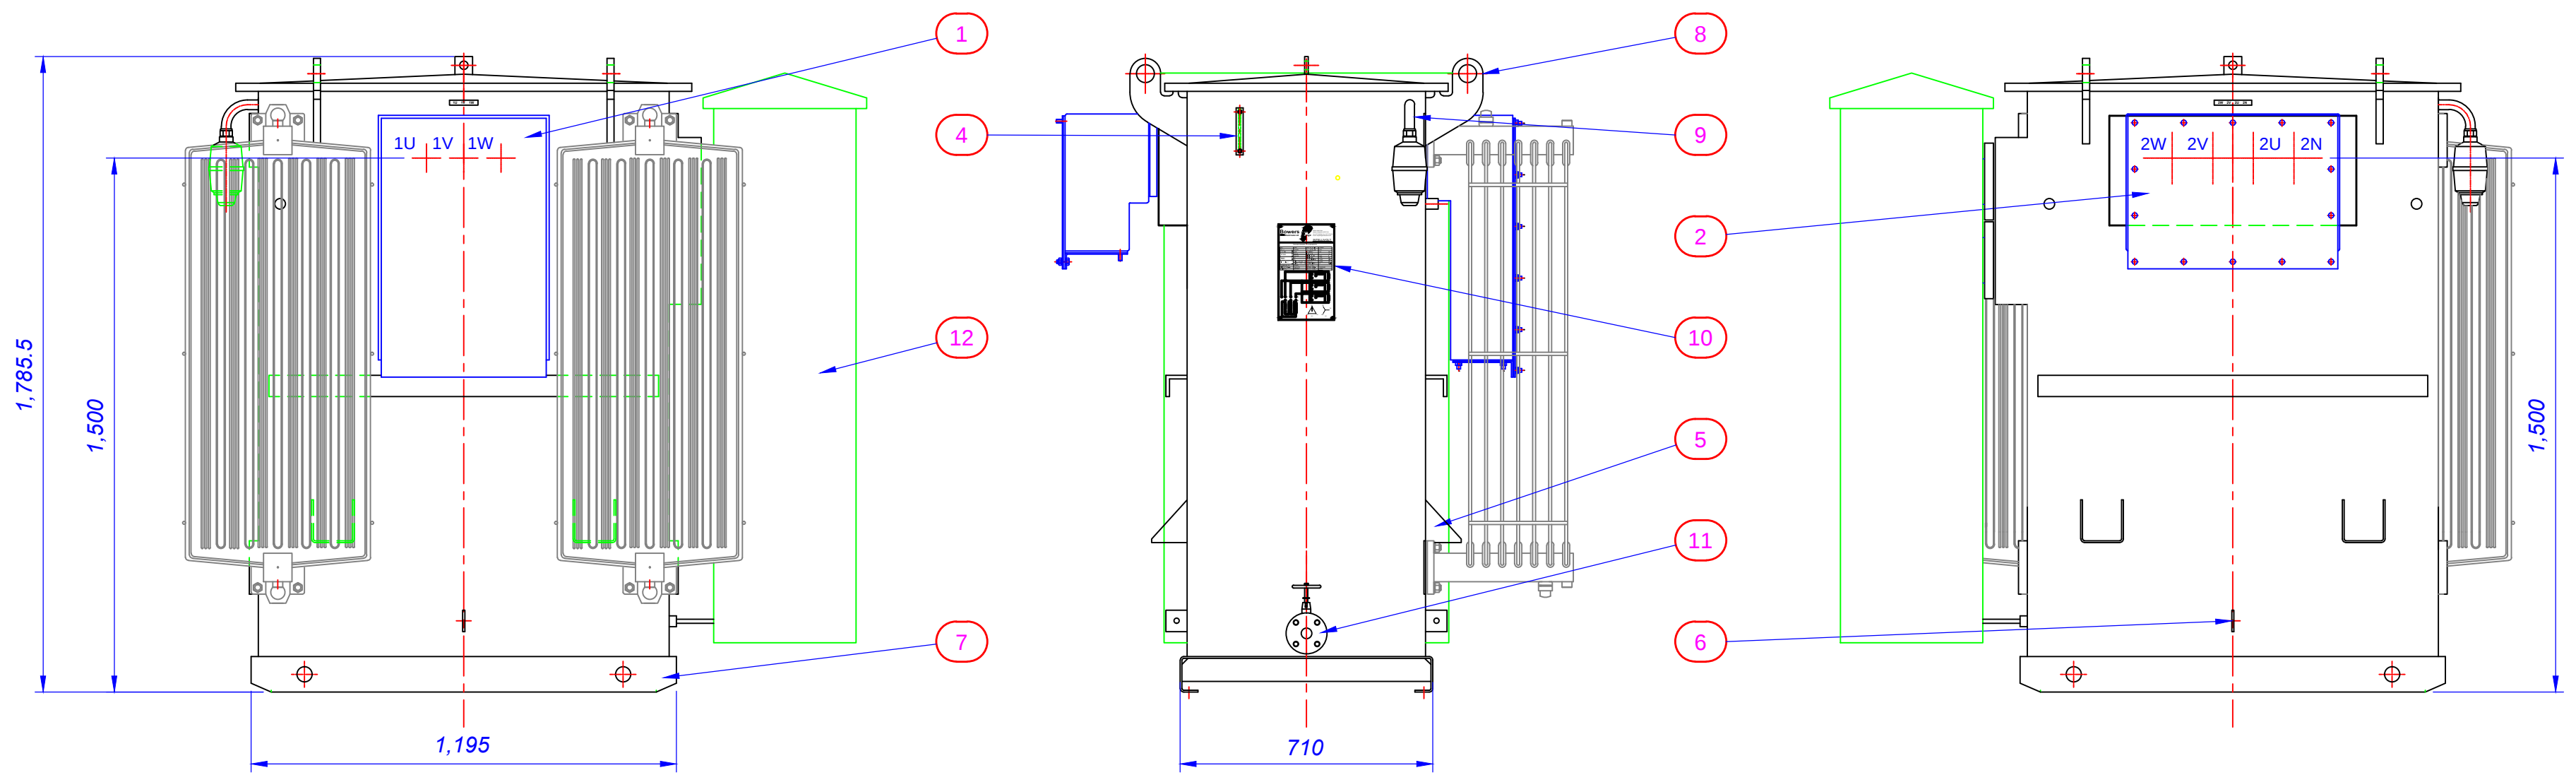

ITEM	DESCRIPTION
1	HV CABLE BOX 3 POLE 1 GLAND (TERMINATION KIT REQD)
2	LV CABLE BOX 4 POLE 4 GLAND AIR FILLED
3	TRANSFORMER OIL FILLER PLUG
4	LIQUID LEVEL GAUGE
5	JACKING ANGLES
6	EARTHING TERMINAL
7	SKID UNDERBASE C/W Ø42 HAULAGE HOLES
8	MAIN LIFTERS
9	BREATHER PIPE
10	RATING AND DIAGRAM PLATE
11	DRAIN VALVE
12	CONTROL CABINET

BOWERS JOB No.	SP63163
OUTPUT	500 kVA
VOLTAGE RATIO	11000 / 433
AMPERES	26.24 / 667
PHASES	3
FREQUENCY	50Hz
VECTOR SYMBOL	Dyn11

ESTIMATED WEIGHTS		KG
CORE AND WINDINGS		1863
COOLING LIQUID	882 LTRS	754
TOTAL WEIGHT		3186

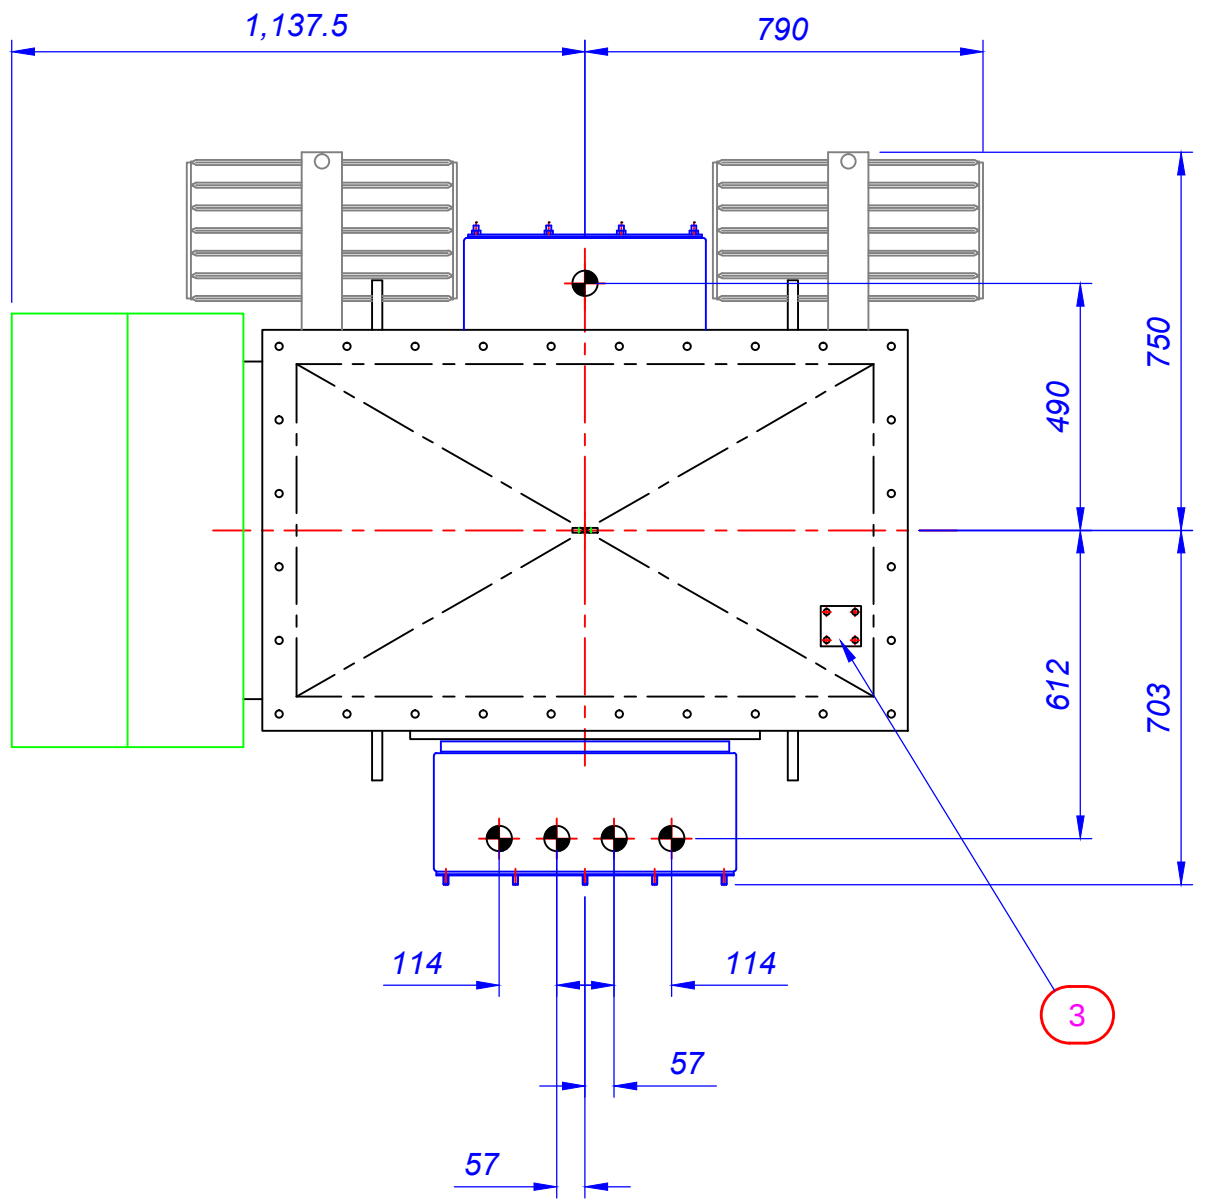

RevNo	Revision note	Date	Signed	Ckd.

Drawn by T.BARKS	Checked by C.MEESE	Approved by D.N	Orig. Job No. SP63163	Date 27/03/13	Dr. Size A2
GENERAL ARRANGEMENT OF 500kVA VOLTAGE OPTIMISATION UNIT					
DRG No. BE6004					
FIRST ANGLE					
Scale 1:15	Revision 0	Sheet 1/1			